



2310 E. Orangethorpe Ave, Anaheim, CA 92806

714-738-6194 / 714-446-0119 FAX

www.accrmfg.com

Series 1773-X Extractor Lever Product Specification

Part Number Code:

1773-X **PP** **BA**

Injector / Ejector Series and Card Size

X = Card thickness in 32nds

- 1 = 1/32" Card Thickness (.031" REF)
- 2 = 2/32" Card Thickness (.062" REF)
- 3 = 3/32" Card Thickness (.093" REF)
- 4 = 4/32" Card Thickness (.125" REF)


Hardware Option:

PP = One Assembly Pin Pre-Started, One Pin Shipped Loose
 Blank = Two Pins (Stainless 3/32" X 1/4") Shipped Loose per Lever

Finish Option:

- BA = Black Anodize per Mil-A-8625, Type II, Class 2
- BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2
- CC = Chem-Film Clear per MIL-C-5541, CL 3 (ROHS)
- CG = Chem-Film Gold per MIL-C-5541, CL 1A
- RA = Red Anodize per Mil-A-8625, Type II, Class 2

Note: Pins and Latch Spring are Stainless Steel and Passivated. Lever and Latch are Made From 6061-T6 Aluminum

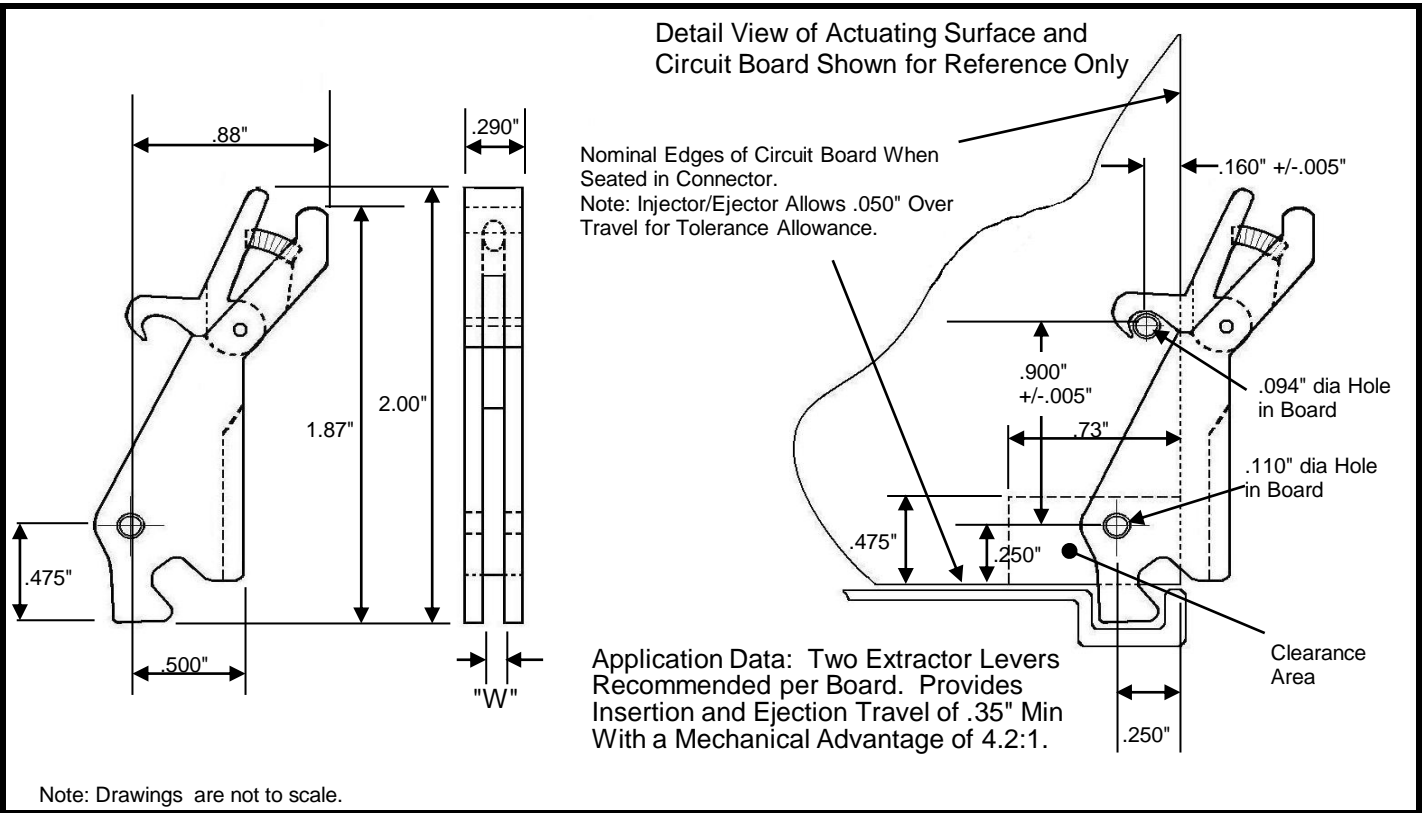

Note: Drawings are not to scale.

BOARD THICKNESS CHART:

Part #	Board Thickness	"W" Dim
1773-1	1/32 - .031	.048"
1773-2	2/32 - .062	.080"
1773-3	3/32 - .093	.110"
1773-4	4/32 - .125	.140"

**ACCR Products are 100% Made in the USA.

FEATURES:

- *High-Strength Lever Action Design Overcomes Extreme Insertion and Ejection Forces.
- *Actuates from a Simple "U" Channel Form.
- *Available with Conductive Finish.
- *Clearance Chamfer not Required on Circuit Board.
- *Narrow Profile to Minimize Interference.
- *Positive Locking Prevents PCB from Backing Out.