



2310 E. Orangethorpe Ave, Anaheim, CA 92806

714-738-6194 / 714-446-0119 FAX

www.accrmfg.com

## Series 1775-X Extractor Lever Product Specification

### Part Number Code:

**1775-X**    **PP**    **BA**    **SS**

#### Injector / Ejector Series and Card Size

**X = Card thickness in 32nds**

**1 = 1/32" Card Thickness (.031" REF)**

**2 = 2/32" Card Thickness (.062" REF)**

**3 = 3/32" Card Thickness (.093" REF)**

**4 = 4/32" Card Thickness (.125" REF)**

#### Hardware Option:

PP = One Assembly Pin Pre-Started, One Pin Shipped Loose

Blank = Two Loose Pins (Stainless 3/32" X 1/4") per Lever

#### SilkScreen Option:

SS = Silk Screen Required ( per customer request/artwork)

Leave Blank = None Required

#### Finish Option:

BA = Black Anodize per Mil-A-8625, Type II, Class 2

BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2


CC = Chem-Film Clear per MIL-C-5541, CL 3 (ROHS)

CG = Chem-Film Gold per MIL-C-5541, CL 1A

RA = Red Anodize per Mil-A-8625, Type II, Class 2

Other colors available on request.

Note: Pins and Latch Spring are Stainless Steel and Passivated. Lever and Latch are Made From 6061-T6 Aluminum

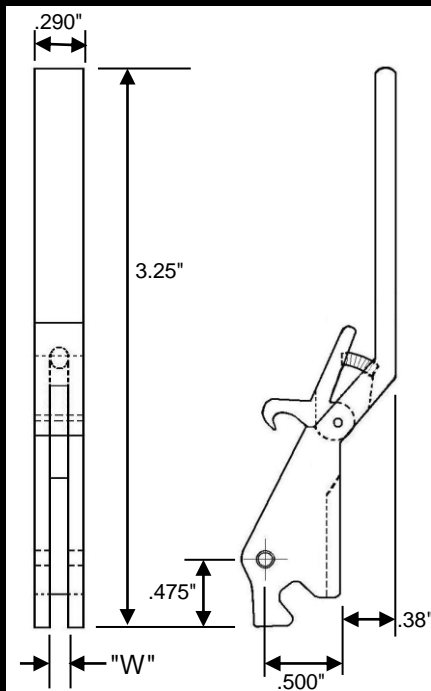


Note: Drawings are not to scale.

### Detail View of Actuating Surface and Circuit Board Shown for Reference Only

#### Application Data:

Two Insertor/Extractor Levers are Recommended per Board. Provides Insertion and Ejection Travel of .35" Minimum With a Mechanical Advantage of 7:1.

Nominal Edges of Circuit Board When Seated in Connector.  
Note: Injector/Ejector Allows .050" Over Travel for Tolerance Allowance.

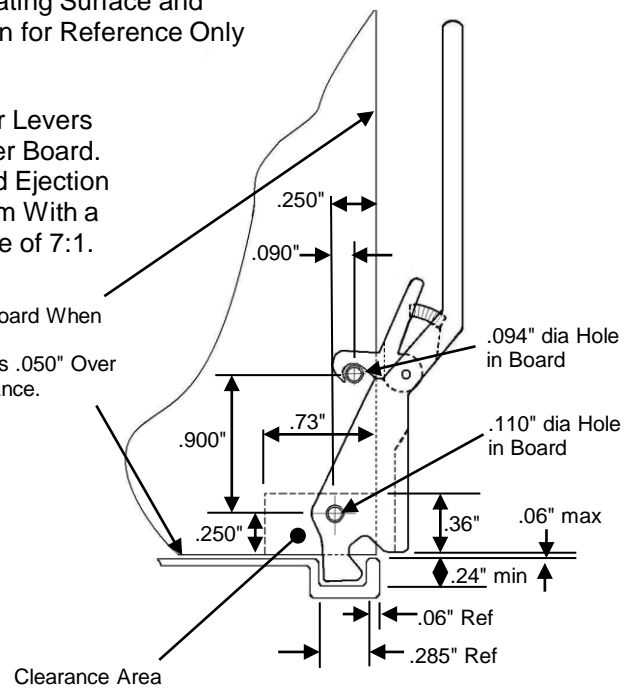

### BOARD THICKNESS CHART:

Part #	Board Thickness	"W" Dim
1775-1	1/32 - .031	.048"
1775-2	2/32 - .062	.080"
1775-3	3/32 - .093	.110"
1775-4	4/32 - .125	.140"

\*\*ACCR Products are 100% Made in the USA.

### FEATURES:

- \*High-Strength Lever Action Design Overcomes Extreme Insertion and Ejection Forces.
- \*Actuates from a Simple "U" Channel Form.
- \*Available with Conductive Finish.
- \*Clearance Chamfer not Required on Circuit Board.
- \*Narrow Profile to Minimize Interference.
- \*Positive Locking Prevents PCB from Backing Out.