



2310 E. Orangethorpe Ave, Anaheim, CA 92806





714-738-6194 / 714-446-0119 FAX

www.accrmfg.com

Series 3220 - Product Specification

Part Number Code:

| | | | | | | | | | |
|---|--|------------|-----------|---|-------------|----------|----------|----------|---|
| ACCR Series | 3220 | MVW | BA | - | X.XX | H | L | R | Option R = Locknut for retaining the screw |
| Hardware Option: | | | | | | | | | |
| 1st Position Blank = 3/32" Hex Socket - Std | | | | | | | | | |
| M = Metric 2.5 Hex Socket Head On Screw | | | | | | | | | |
| V = Visual Lock Indicator (Add .20" To Screw Length) | | | | | | | | | |
| W = Lock And Flat Washer (Add .06" To Screw Length) | | | | | | | | | |
| Finish Option: | | | | | | | | | |
| BA = Black Anodize per Mil-A-8625, Type II, Class 2 | | | | | | | | | |
| BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2 | | | | | | | | | |
| CC = Chem-Film Clear per Mil-C-5541 (ROHS) | | | | | | | | | |
| CG = Chem-Film Gold per Mil-C-5541 | | | | | | | | | |
| EN = Electroless Nickel per Mil-C-26074 | | | | | | | | | |
| BL = Black Hard Anodize with Dry Film Lube per Mil-L46010 | | | | | | | | | |
| RA = Red Anodize per Mil-A-8625, Type II, Class 2 | | | | | | | | | |
| | Mounting Options: | | | | | | | | |
| | E = Extra mounting hole | | | | | | | | |
| | H = C'bore .156" Dia. X .200" Deep X .068/.073" Dia. Hole Thru, CSK 100 degree X .140" Dia. | | | | | | | | |
| | T0 = 0-80 Tapped Thru Holes | | | | | | | | |
| | T2 = 2-56 Tapped Thru Holes | | | | | | | | |
| | TM2 = Metric 2 Tapped Thru Holes | | | | | | | | |
| | TM2.5 = Metric 2.5 Tapped Thru Holes | | | | | | | | |
| | P = Indexing Pins .062 x .050" (two positions only) | | | | | | | | |
| | Assembly Length in decimal inches: | | | | | | | | |
| | Standard lengths = 2.80, 3.80 and 4.80 | | | | | | | | |
| | Other lengths or specifications on request. | | | | | | | | |

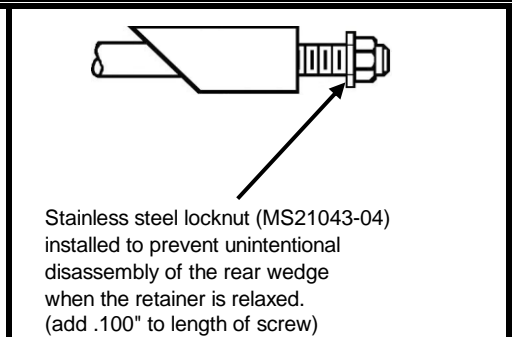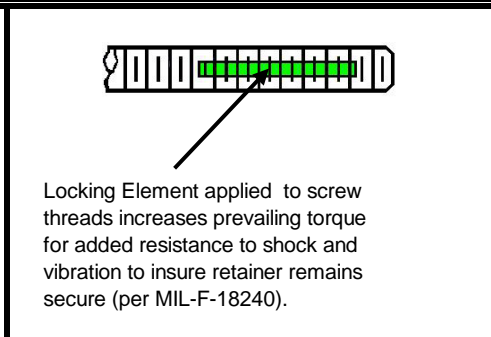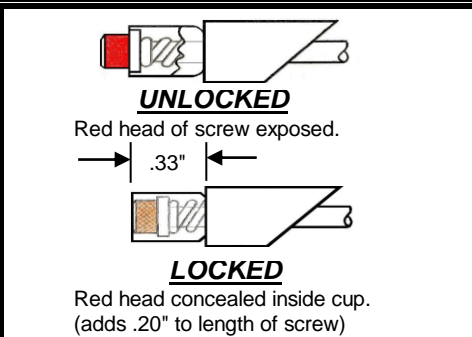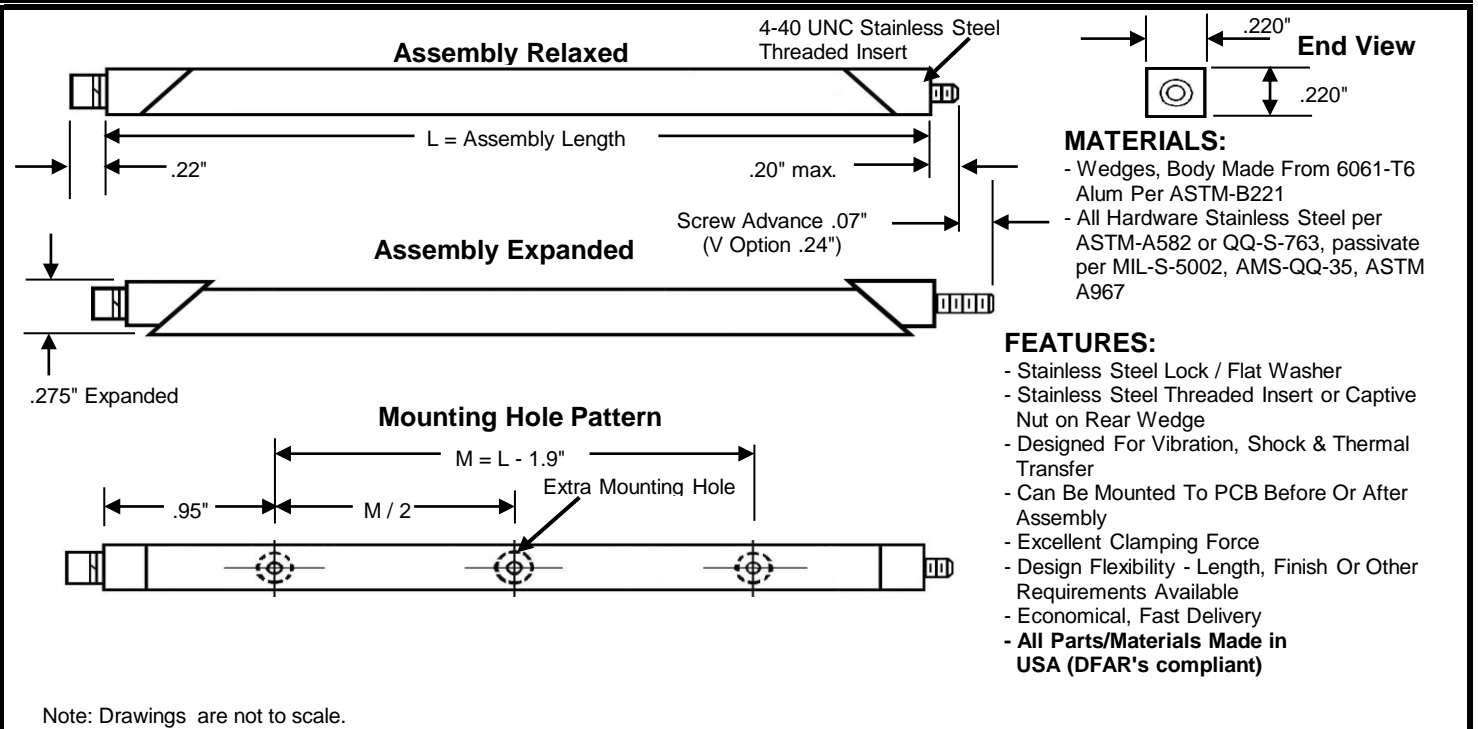

"V" Option:
Provides color code on the screw head as a visual indicator the retainer is locked.

"L" Option:
Adds Lock Patch to screw threads for additional resistance to shock and vibration.

"R" Option:
Add MS21043 Lock Nut to prevent unintentional disassembly of rear wedge.