



2310 E. Orangethorpe Ave, Anaheim, CA 92806

714-738-6194 / 714-446-0119 FAX

www.accrmfg.com

## Series 5375 - Product Specification

### Part Number Code:

**5375 MV BA - X.XX EH L K**

ACCR Series

#### Hardware Option:

Standard = NAS1352C08 (9/64" Hex Socket Head with 8-32 Thread)

M = M4 Socket Head Cap Screw

V = Visual Lock Indicator

#### Finish Option:

BA = Black Anodize Per Mil-A-8625, Type II, Class 2

BH = Black Hard Anodize Per Mil-A-8625, Type III, Class 2

CC = Chem-Film Clear Per Mil-C-5541 (RoHS)

CG = Chem-Film Gold Per Mil-C-5541

EN = Electroless Nickel Per Mil-C-26074

BL = Black Hard Anodize With Dry Film Lube Per Mil-L46010

Option K = Slot In Shaft And Screw For Retention

Option L = Locking Element On Screw Threads

#### Mounting Options:

E = Extra Mounting Hole

H = .134/.139" Dia. Thru Hole with Countersink

T2 = 2-56 Tapped Thru Holes

T4 = 4-40 Tapped Thru Holes

TM2 = Metric M2 Tapped Thru Holes

TM2.5 = Metric M2.5 Tapped Thru Holes

TM3 = Metric M3 Tapped Thru Holes


#### Assembly Length in decimal inches:

Standard Lengths = 2.80, 3.80 and 4.80

Other Lengths On Request.

100% Made In The USA

100% Made In The USA

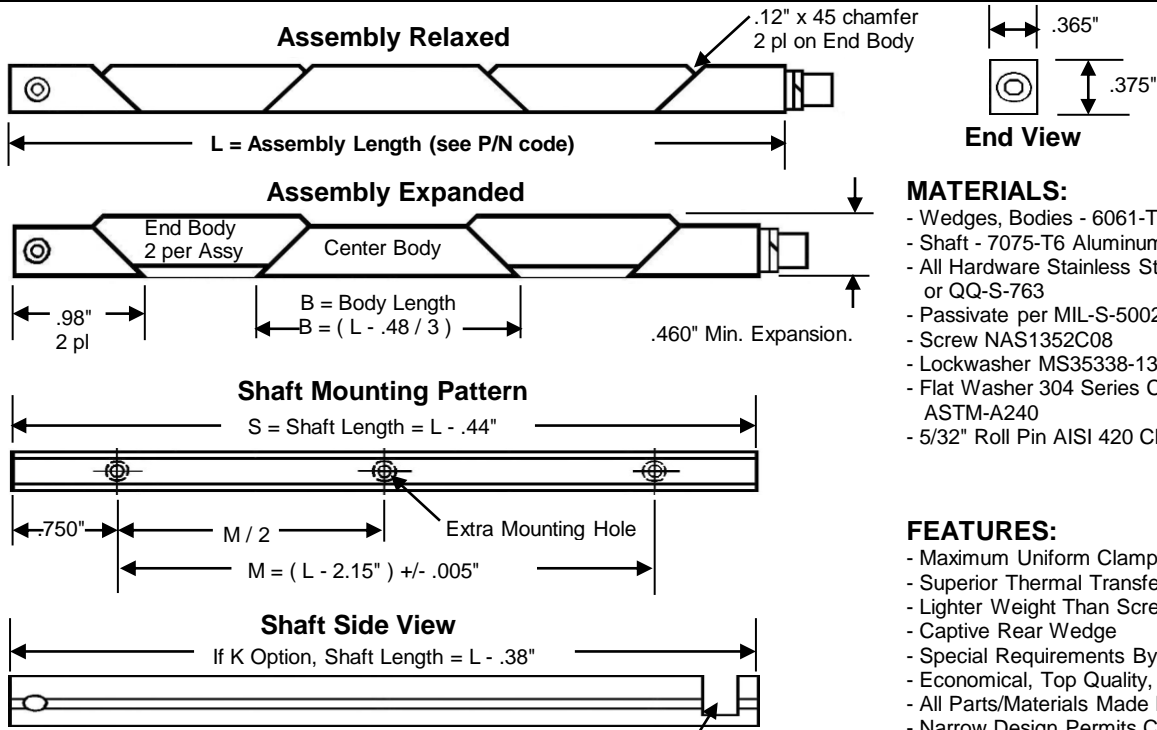

#### MATERIALS:

- Wedges, Bodies - 6061-T6 per ASTM-B221
- Shaft - 7075-T6 Aluminum per ASTM-B221
- All Hardware Stainless Steel ASTM-A582 or QQ-S-763
- Passivate per MIL-S-5002
- Screw NAS1352C08
- Lockwasher MS35338-137
- Flat Washer 304 Series CRES per ASTM-A240
- 5/32" Roll Pin AISI 420 Chrome CRES

#### FEATURES:


- Maximum Uniform Clamping Force
- Superior Thermal Transfer
- Lighter Weight Than Screw Style Lock
- Captive Rear Wedge
- Special Requirements By Request
- Economical, Top Quality, Fast Delivery
- All Parts/Materials Made In The USA
- Narrow Design Permits Closer Board Spcg

Note: Drawings are not to scale.



#### UNLOCKED

Red head of screw exposed.




#### LOCKED

Red head concealed inside cup.



Locking Element applied to screw threads increases prevailing torque for added resistance to shock and vibration to insure the retainer remains securely in place (per MIL-F-18240).



Slot in the retainer shaft and a groove near the end of the screw provide an added measure of security to prevent unintentional removal of the screw from the retainer.

#### "V" Option:

Provides color code on the screw head as a visual indicator the retainer is locked.

#### "L" Option:

Adds Lock Patch to screw threads for additional resistance to shock and vibration.

#### "K" Option:

Add Key Slot to shaft and screw to prevent unintended removal of the screw from the retainer assembly.