



2310 E. Orangethorpe Ave, Anaheim, CA 92806

714-738-6194 / 714-446-0119 FAX

www.accrmfg.com

Series 1751-X Extractor Lever Product Specification

Part Number Code:

1751-X **PP** **BA** **SS**

Injector / Ejector Series and Card Size

X = Card thickness in 32nds

1 = 1/32" Card Thickness (.031" REF)

2 = 2/32" Card Thickness (.062" REF)

3 = 3/32" Card Thickness (.093" REF)

4 = 4/32" Card Thickness (.125" REF)

Hardware Option:

PP = Pre-Started Stainless Steel Assembly Pin

Blank = One Pin (Stainless 3/32" X 1/4") bagged per Lever

SilkScreen Option:

SS = SilkScreen Required (per customer request/artwork)

Leave Blank = None Required

Finish Option:

BA = Black Anodize per Mil-A-8625, Type II, Class 2


BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2

CC = Chem-Film Clear per MIL-C-5541, CL 3 (ROHS))

CG = Chem-Film Gold per MIL-C-5541, CL 1A


RA = Red Anodize per Mil-A-8625, Type II, Class 2

Other colors available on request.

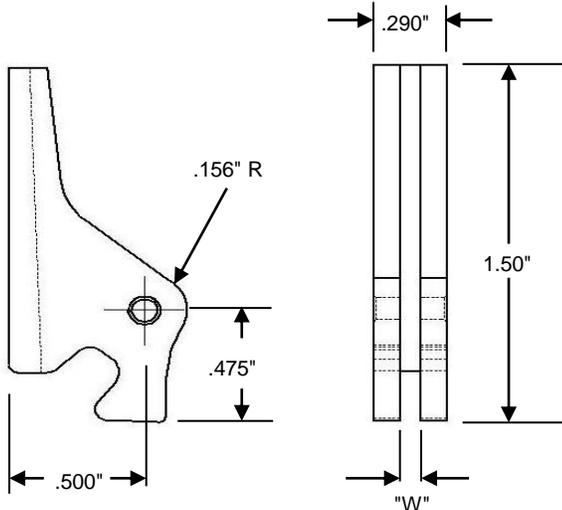

Nominal Edges of Circuit Board When Seated in Connector.

Note: Injector/Ejector Allows .035" Over Travel for Tolerance Allowance.

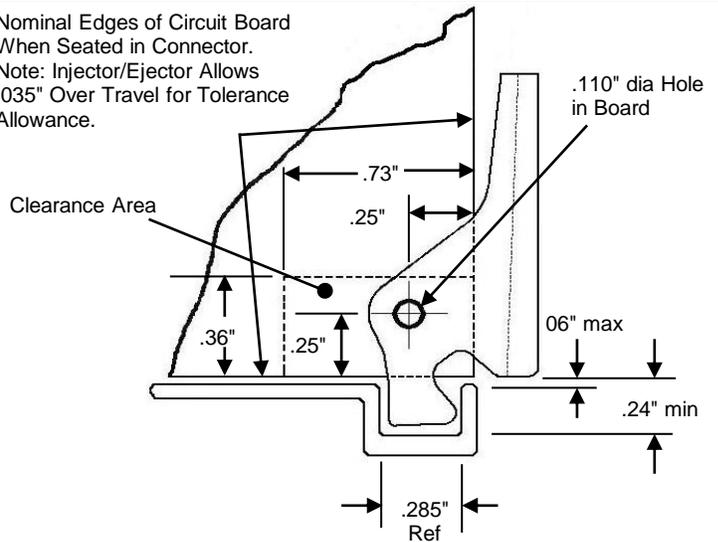

Material: 6061-T6 Aluminum Alloy

Detail View of Actuating Surface and Circuit Board Shown for Reference Only

Note: Drawings are not to scale.

BOARD THICKNESS CHART:

Part #	Board Thickness	"W" Dim
1751-1	1/32 - .031	.048"
1751-2	2/32 - .062	.080"
1751-3	3/32 - .093	.110"
1751-4	4/32 - .125	.140"

****ACCR Products are 100% Made in the USA.**

FEATURES:

- *High-Strength Lever Action Design Overcomes Extreme Insertion and Ejection Forces.
- *Actuates from a Simple "U" Channel Form.
- *Available with Conductive Finish.
- *Clearance Chamfer not Required on Circuit Board.
- *Narrow Profile to Minimize Interference.
- *100% Made in the USA.

APPLICATION DATA:

Two Inserter-Extractors are Recommended per Board. Provides Insertion and Ejection Travel of .35" Minimum with a Mechanical Advantage of Approximately 3.3 : 1.