
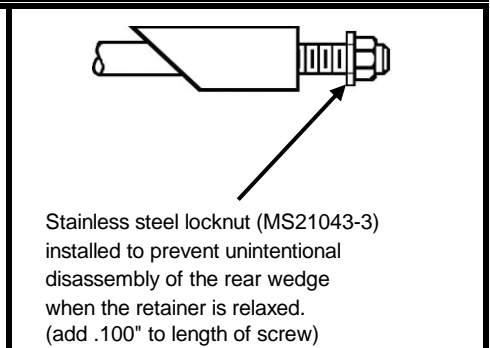
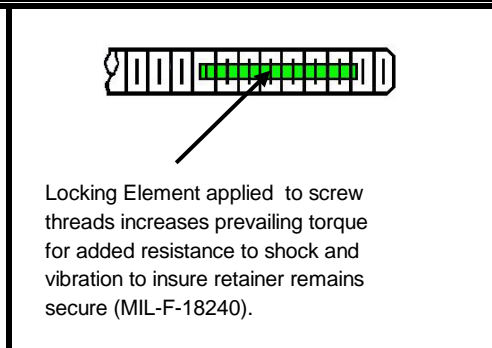
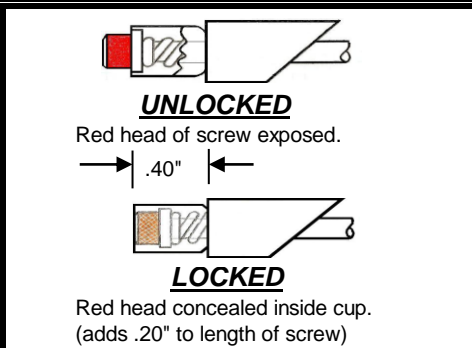


Series 3500 - Product Specification

Part Number Code:

ACCR Series	3500	MVW	BA	-	X.XX	H	L	R	Option R = Locknut for retaining the screw
Hardware Option:									Option L = Locking Element on screw threads
1st Position Blank = 5/32" Hex Socket Std									Mounting Options:
M = Metric 4mm Hex Socket Head on screw (5/32" Hex Socket Std)									E = Extra mounting hole
V = Visual Lock indicator (add .20" to screw length)									H = C'bore .156" Dia. X .200" Deep X .068/.073" Dia. Hole Thru, CSK 100 degree X .140" Dia.
W = Lock and Flat Washer (add .100" to screw length)									T0 = 0-80 Tapped Thru Holes
Finish Option:									T2 = 2-56 Tapped Thru Holes
BA = Black Anodize per Mil-A-8625, Type II, Class 2									TM2 = Metric 2 Tapped Thru Holes
BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2									TM2.5 = Metric 2.5 Tapped Thru Holes
CC = Chem-Film Clear per Mil-C-5541 (ROHS)									P = Indexing Pins .062 x .050" (two positions only)
CG = Chem-Film Gold per Mil-C-5541									Assembly Length in decimal inches:
EN = Electroless Nickel per Mil-C-26074									Standard lengths = 2.80, 3.80 and 4.80
BL = Black Hard Anodize with Dry Film Lube per Mil-L46010									Other lengths or specifications on request.
RA = Red Anodize per Mil-A-8625, Type II, Class 2									

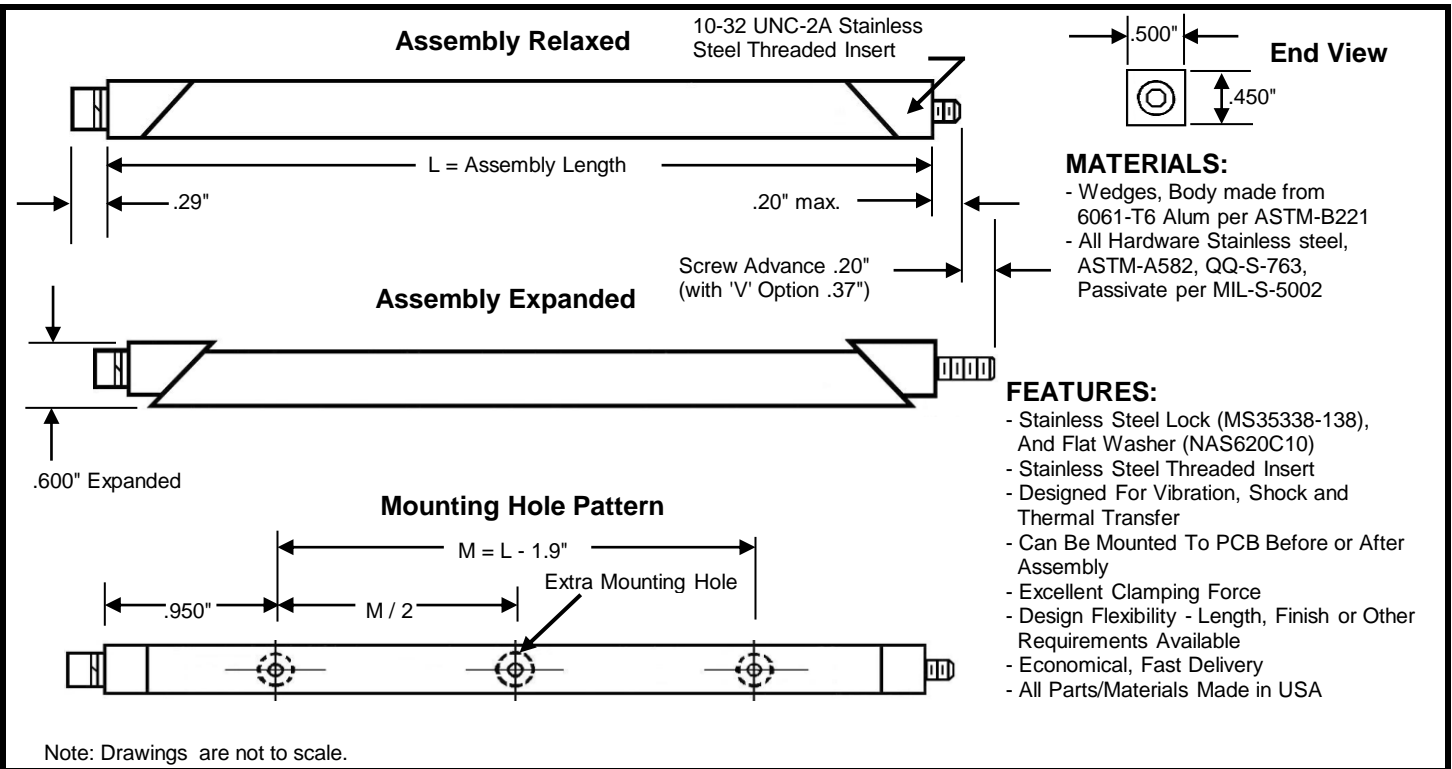

"V" Option:
Provides color code on the screw head as a visual indicator the retainer is locked.

"L" Option:
Adds Lock Patch to screw threads for additional resistance to shock and vibration.

"R" Option:
Add MS21043 Lock Nut to prevent unintentional disassembly of rear wedge.